


cartulina

CMPC Valdivia RC

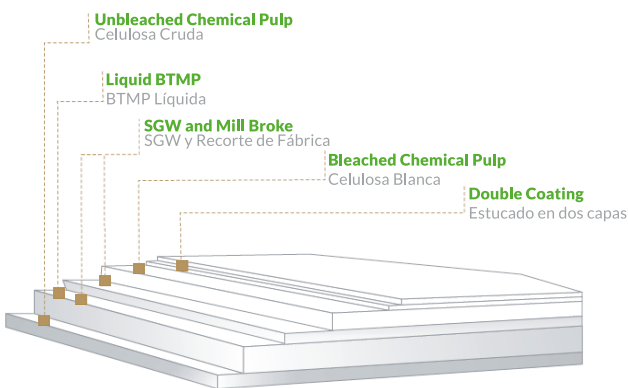

Coated Folding Boxboard with Kraft Back Cartulinas Estucadas Reverso Café

Grammage Gramaje TAPPI 410	Stiffness Taber 15° Rigidez TAPPI 489		Stiffness L&W 5° Rigidez TAPPI 556		Thickness Espesor TAPPI 411	
	mN x m		mN x m*		Pts / Pt*	µm
g/m ²	CD	MD	CD	MD		
175	2,1	4,2	4,1	8,2	10	255
190	2,5	5,0	4,9	9,8	11	280
205	3,0	6,0	5,9	11,7	12	305
220	3,6	7,2	7,0	14,4	13	330
235	4,4	8,8	8,6	17,6	14	360
255	5,7	11,4	11,1	24,0	16	405
275	7,4	14,8	14,4	32,6	18	450
295	9,0	18,0	17,6	42,1	19	495
+/-5%	-10%		-10%		+/-5%	

*Only as reference / Valores referenciales

Smoothness / Lisura
TAPPI 555

PPS (µm)
1,4 + 0,5

Brightness / Blancura
TAPPI 525

Top / Cara (%)
80 +/-2

Cobb (1min)
TAPPI 441

Top (g/m²)
≤45

Cobb (2min)
TAPPI 441

Back (g/m²)
≤80

Moisture / Humedad
TAPPI 412

(%)
6,5 - 9,0

Notes / Notas:

1- Test climate 23+/-1°C and 50+/-2% RH, (TAPPI 402) / Las condiciones atmosféricas de los ensayos son 50 +/-2% de H.R y 23 +/- 1°C

2- Tolerances based upon 95% confidence limits, (for pallets or reels) / Las tolerancias especificadas para cada uno de los ensayos se garantizan para el 95% del lote, ya sea en hojas o rollos en base a muestreo representativo.

3- All specifications mentioned above may be subject to technical changes. / Todas las especificaciones aquí entregadas pueden ser sujetas a cambios técnicos.

CMPC Biopackaging Boxboard

Agustinas 1343 Piso 5, Santiago Chile

Tel.: (56 2) 2441 2020 • Fax: (56 2) 2672 34 50

e-mail: cartulinas-cmpc@gerencia.cmpc.cl

boxboard.cmpcbiopackaging.com

Issued / Fecha de especificación:
June 2016 / Junio 2016



The mark of responsible forestry

Look for FSC® certified products



biopackaging